


Plug&Play ip camera series

Outdoor Plug&Play MPEG4 IP cameras

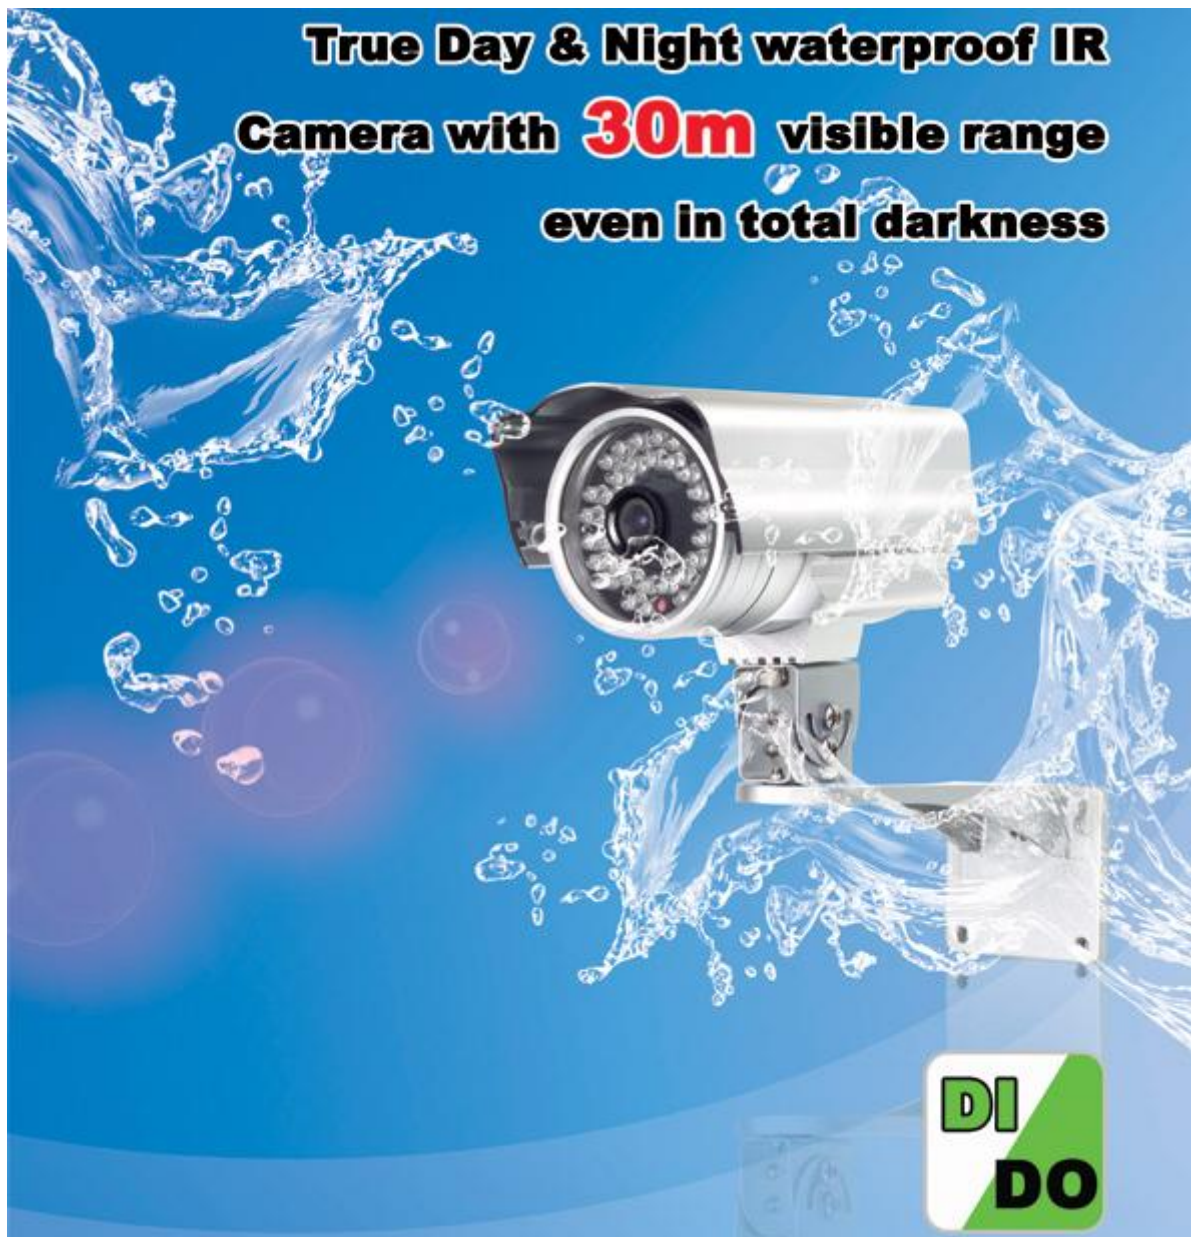

Features

- Easily access the camera from anywhere in the world via the ID/password (Through accompanied video management software, no complicated DNS settings needed)
- 3GPP/ISMA support
- Dual video streaming with separate frame rate/resolution/bandwidth settings for PC and mobile.
- Adjustable numbers of IR led control – support automatic, manual and scheduled modes. But only can see black & white video when IR led is on.
- Connect up to 20 users simultaneously
- Supports enhanced MPEG-4 compression

Plug&Play ip camera series

- Supports resolution of up to 640x480 pixels at 30 fps.
- Free video management software CamView accompanied for easy access and multi-camera management.
- View the video anywhere in the Internet and 3G phone.
- Motion Detection and E-mail/FTP notification
- Synchronize the system time through NTP protocol.
- Built-in Web server for managing via standard web browser.
- Event scheduling.
- NAS storage access.
- Online Firmware upgrade, will enter safe mode when power is off during critical firmware upgrade point.
- Watchdog function to prevent system failure.

Plug&Play ip camera series

Specifications

Models	TX-IP6002
Power	DC 12V, 1 A
Processors	RISC CPU, hardware video processing and compression.
Network interface	Ethernet 10BaseT/100BaseTX, Auto-MDIX, RJ-45
Image sensor	RGB VGA 1/4 inch CMOS Automatic exposure control, automatic white balance, automatic gain control, automatic brightness control.
Light sensitivity	0.2 Lux (IR led off) 0 Lux (with 10 meters IR leds on) Automatically turn on the IR led in low light environment.
Lens	4.5 mm, F1.9, viewing angle: 55.6°, fixed iris. focus range: 30 cm to infinity Day & night IR lens
Water resistant	IP66 grade water resistant
IR LEDs	Adjustable numbers of 36 IR LEDs for up to 30 m distance night illumination.
Buttons	One reset button, to factory default settings
Video compression	MPEG-4 Part 2 (ISO/IEC 14496-2) with motion detection, profiles: Simple Profile, level 0-3
Frame rate	Up to 30 fps in all resolutions
Video streaming	MPEG-4 Separate frame rate/resolution/bandwidth settings for PC and mobile.
Video settings	Resolution: VGA(640x480), QVGA(320x240), QQVGA(160x120) Bandwidth : 64k, 128k, 256k, 512k, 768k, 1M, 1.2M, 1.5M bps Frame rate : 1~5, 10, 15, 20, 25, 30 fps
Security	Web management username/password protection Video display ID/password protection
Installation, management and maintenance	Installation tool on CD and Web-based configuration Automatic configuration backup and restore Video management software-CamView for video access and multi-camera management Firmware upgrades via FTP

Plug&Play ip camera series

Minimum browsing management software requirements	Web and	Built-in web server for standard web browser access Pentium 4(or equivalent AMD) CPU 1.0 GHz or higher, 1 GB RAM
Supported protocols		IPv4, HTTP, TCP, ICMP, RTSP, RTP, UDP, RTCP, SMTP, SNTP, FTP, DHCP, ARP, DNS, PPPoE, etc.
Accessories (included)		Power adaptor, camera bracket, body shield, RJ45 ethernet cable, quick installation guide, CD with installation tool/software and User's Manual, ID/Password card.
Video management software		Surveillance application for viewing and archiving up to 16 cameras
Users		Up to 20 simultaneous unicast users (depends on video settings) Unlimited users using multicast
Alarm and event management		Events triggered by video motion detection Notification/upload of JPEG images over FTP and/or email
Dimensions (HxWxD) and weight	and	130 x 77 x 78 mm, 498 g, exclude camera bracket, exclude power adaptor
Approvals		EMC - CE, FCC Part 15 Subpart B Class B Power supply: CE, FCC, UL, EN 60950
Operating conditions		-20-60 °C Humidity 20 – 80% RH (non-condensing)